

EFI-P2 A 25/0.03

RCCB



ETI Code:	002061111
Function:	RCCB
Catalogue Group:	EFI-P2
Application:	IEC/EN 61008
Built-in depth:	68 mm
Rated residual operating current IDn:	0.03 A
Rated residual current:	0.03 A
Residual current type:	A
Rated current:	25 A
Depth:	68 mm
Type of Installation:	TH 35
Number of poles:	1+N
Rated conditional short-circuit current Inc:	10 kA
Tripping time:	Undelayed
Rated AC voltage:	230/240 V
Rated Frequency:	50/60 Hz
Rated cross section:	1-25 mm ²
Standards:	IEC/EN 61008
IP rating:	IP20

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



CERTIFICATE



2D FILE



3D FILE



EPLAN FILE



WHITE PAPER

ETIM

Additional equipment possible	Yes
Built-in depth	68 mm
Leakage current type	A
Surge current capacity	0.4 kA
Degree of protection (IP)	IP20
Mounting method	DIN rail
Rated fault current	0.03 A
Frequency	50/60 Hz
Number of poles	2
Short-circuit breaking capacity (Icw)	10 kA
Rated voltage	240 V
Rated current	25 A
Width in number of modular spacings	2
Connectable conductor cross section multi-wired(Min)	1 mm²
Connectable conductor cross section multi-wired(Max)	25 mm²

Logistics

Product

Net weight of the product	164 g
Net width	35.9 mm
Net height	88.7 mm
Net depth	72.35 mm
Stock unit of measure	pcs


Basic Packaging

Basic packaging quantity	1 pcs
EAN code for a basic packaging	3838895864240
Basic packaging weight	0.18 kg
Basic Packaging Dimensions Height	0.075 m
Basic Packaging Dimensions Width	0.09 m
Basic Packaging Dimensions Depth	0.038 m
Basic packaging volume	0 m³

Transport Packaging

Transport packaging quantity	54 pcs
EAN code for a transport packaging	3838895864257
Transport packaging weight	10.07 kg
Transport Packaging Dimensions Height	0.25 m
Transport Packaging Dimensions Width	0.235 m
Transport Packaging Dimensions Depth	0.295 m
Transport packaging volume	0.017 m³
Pallet quantity	2,808 pcs
Customs tariff	85362010

Wiring diagram

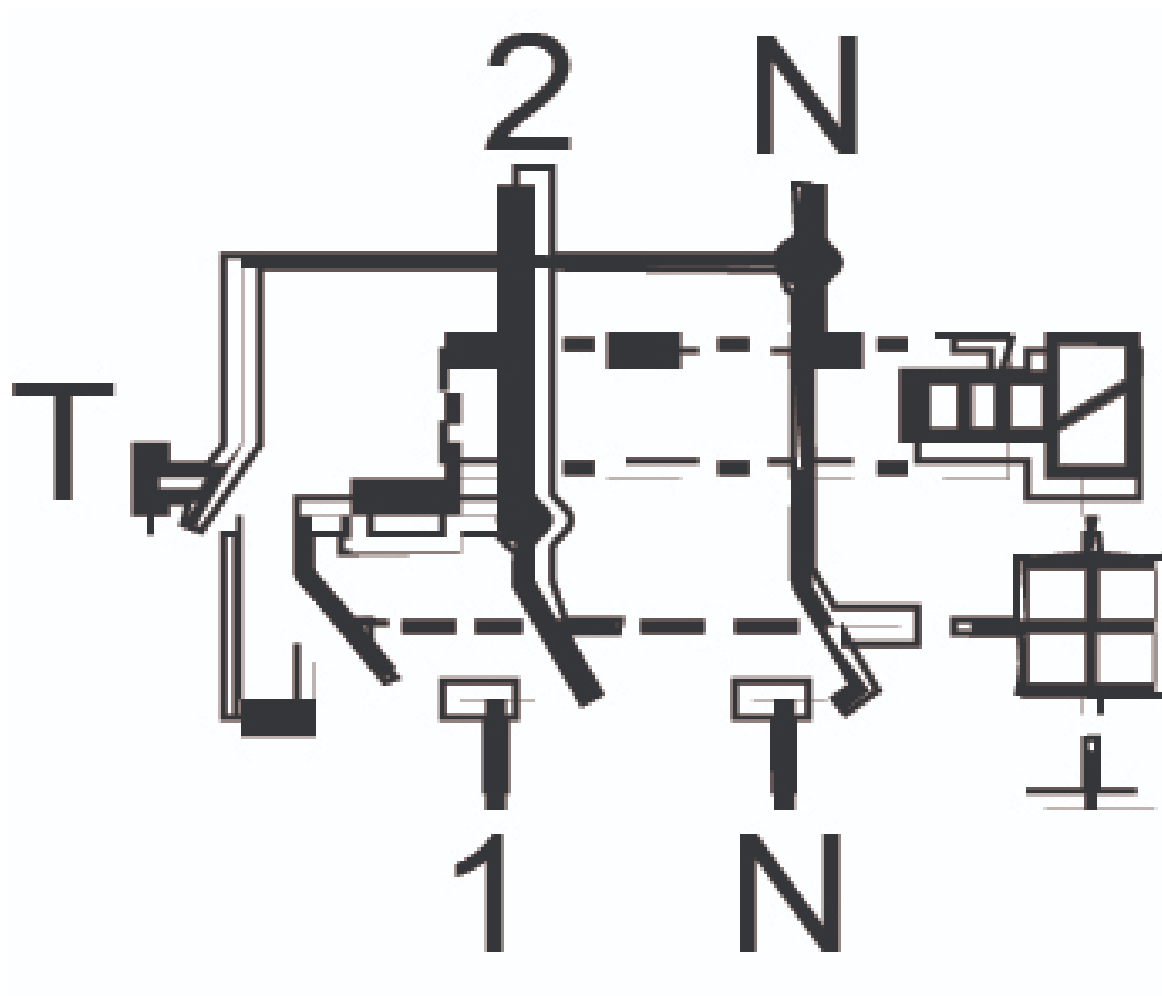

Technical drawing of the 3000 Series Handheld Cutter, showing front and side views with dimensions and labels.

Front View Dimensions:

- Overall width: 45
- Top edge radius: R17
- Top edge angles: 48° and 38°
- Top edge chamfer: 1.5
- Top edge chamfer angle: 30°
- Top edge chamfer radius: R17
- Top edge chamfer angle: 30°
- Top edge chamfer radius: R17
- Top edge chamfer angle: 30°

Side View Dimensions:

- Overall height: 69.7
- Height to top edge: 58.1
- Height to bottom edge: 52.7
- Overall width: 87.5

Labels and Markings:

- Max Torque 30N (1 - 25mm²)
- Step Length 12mm
- CE mark
- Warning symbol (crossed-out square)

