

EFI-P4 A 40/0.03

RCCB



ETI Code:	002061512
Function:	RCCB
Catalogue Group:	EFI-P4
Application:	IEC/EN 61008
Built-in depth:	68 mm
Rated residual operating current IDn:	0.03 A
Rated residual current:	0.03 A
Residual current type:	A
Rated current:	40 A
Depth:	68 mm
Type of Installation:	TH 35
Number of poles:	3+N
Rated conditional short-circuit current Inc:	10 kA
Rated AC voltage:	400/415 V
Rated Frequency:	50/60 Hz
Rated cross section:	1-25 mm ²
Standards:	IEC/EN 61008
IP rating:	IP20

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



CERTIFICATE



2D FILE



3D FILE



WHITE PAPER



EPLAN FILE

ETIM

Additional equipment possible	Yes
Built-in depth	68 mm
Leakage current type	A
Surge current capacity	0.4 kA
Degree of protection (IP)	IP20
Mounting method	DIN rail
Rated fault current	0.03 A
Frequency	50/60 Hz
Number of poles	4
Short-circuit breaking capacity (Icw)	10 kA
Rated voltage	415 V
Rated current	40 A
Width in number of modular spacings	4
Connectable conductor cross section multi-wired(Min)	1 mm²
Connectable conductor cross section multi-wired(Max)	25 mm²

Logistics

Product

Net weight of the product	0.31 kg
Net width	71.8 mm
Net height	87.5 mm
Net depth	72.86 mm
Stock unit of measure	pcs


Basic Packaging

Basic packaging quantity	1 pcs
EAN code for a basic packaging	3838895851417
Basic packaging weight	0.298 kg
Basic Packaging Dimensions Height	0.075 m
Basic Packaging Dimensions Width	0.09 m
Basic Packaging Dimensions Depth	0.074 m
Basic packaging volume	0 m³

Transport Packaging

Transport packaging quantity	27 pcs
EAN code for a transport packaging	3838895851424
Transport packaging weight	8.396 kg
Transport Packaging Dimensions Height	0.25 m
Transport Packaging Dimensions Width	0.235 m
Transport Packaging Dimensions Depth	0.295 m
Transport packaging volume	0.017 m³
Pallet quantity	1,404 pcs
Customs tariff	85362010

Wiring diagram

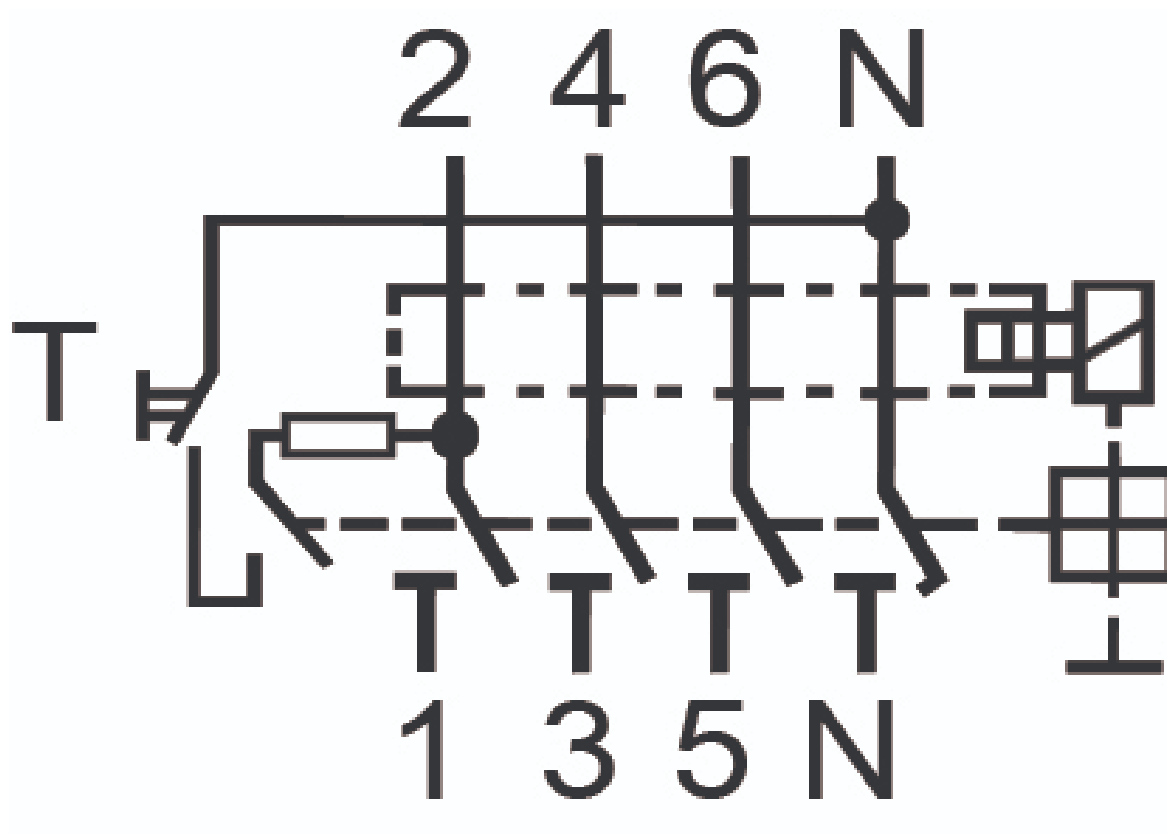

Dimension

