ECT 4x18PT

Műanyag elosztó



ETI kód:	**001100270**
Sorok:	**4**
Katalóguscsoport:	**ECT falra szerelhető, műanyag elosztószekrények, IP40**
Ajtó típusa:	**Átlátszó ajtó**
Méret:	**4x18**
Szerelési mód:	**Falra szerelhető**
IP védettség:	**IP40**
Méret (Sorok száma):	**4**
Modulszám (Összes/soronként):	**72/18**
Ajtó (anyag, szín):	**Műanyag, Átlátszó**
Elosztó (anyag, szín):	**plastic, white**
PE/N sorkapcsok száma:	**30**
Lángállósság (°C):	**650 °C**
Névleges feszültség DC:	**400 V**
Névleges áram:	**63 A**
Névleges feszültség AC (V):	**400 V**

Online termékoldal

Dokumentumok

MŰSZAKI ADATKATALÓGUS

HASZNÁLATI ÚTMUTATÓ

NYILATKOZAT

2D FÁJL

3D FÁJL

EPLAN FÁJL

ETIM

Width	**396 mm**
DIN-rail	**Igen**
Type of covering	**Door**
Neutral terminal block	**Igen**
Transparent cover/door	**Igen**
Degree of protection (IP)	**IP40**
Mounting method	**Surface mounted**
Signal passing door	**Igen**
Earthing terminal block	**Igen**
Number of rows	**4**
Housing material	**Plastic**
Depth	**112 mm**
Colour	**White**
Type of door	**Single**
Cover model	**Closed**
Height	**651 mm**
Width in number of modular spacings	**18**
RAL-number	**9 003**

Logisztika

Termék

Tömeg	**3,2 kg**
Net width	**395,8 mm**
Net height	**654,6 mm**
Net depth	**111,6 mm**
Stock unit of measure	**pcs**

Alapcsomagolás

Basic packaging quantity	**1 pcs**
EAN code for a basic packaging	**3838895877493**
Basic packaging weight	**3,2 kg**
Basic Packaging Dimensions Height	**396 mm**
Basic Packaging Dimensions Width	**651 mm**
Basic Packaging Dimensions Depth	**112 mm**
Basic packaging volume	**28,873 dm³**

Szállítási csomagolás

Transport packaging quantity	**5 pcs**
EAN code for a transport packaging	**3838895877509**
Transport packaging weight	**16 kg**
Transport Packaging Dimensions Height	**665 mm**
Transport Packaging Dimensions Width	**570 mm**
Transport Packaging Dimensions Depth	**405 mm**
Transport packaging volume	**153,515 dm³**
Pallet quantity	**60 pcs**
Customs tariff	**85381000**

Dimension

Technical data	
Degree of protection	IP 40*
Colour	white
Double insulation	⧈
Standard	IEC 62208, IEC 60670-1, IEC 60670-24
Installation temperature	-25° / +60°C
Glow wire test	650°C

*IP 30 for EC 1+1, 3+1, 3+2, ECGxxMEDIA

Number of N - PE terminals:


ECT/ECM4PT/PO	2x4	4 PE / 4 N
ECT/M8PT/PO	2x8	8 PE / 8 N
ECT/M12PT/PO	2x10	10 PE / 10 N
ECT/M18PT/PO	2x13	13 PE / 13 N
ECT/M24PT/PO	2x13	13 PE / 13 N
ECT/M36PT/PO	2x15	15 PE / 15 N
ECT48PT/PO	2x20	20 PE / 20 N
ECT/M 2x18PT/PO	2x15	15 PE / 15 N
ECT/M 3x18PT/PO	2x25	25 PE / 25 N
ECT 4x18PT/PO	2x30	30 PE / 30 N
ECG14	2x10	10 PE / 10 N
ECG28	2x13	13 PE / 13 N
ECG42	2x15	15 PE / 15 N
ECG56	2x20	20 PE / 20 N
ECG70	2x30	30 PE / 30 N
EC 1+1	-	
EC 3+1	-	
EC 3+2	2x4	4 PE / 4 N

- ECG14, ECG28, ECG42 have 1 additional free space to build in an extra PST-UNI terminal.
- ECG56 has 3 additional free spaces to build in up to 3 extra PST-UNI terminals.
- Double insulation not valid for ECG MEDIA

Surface mounted distribution board

type	Dimensions					Max. allowed power losses when Max. number of devices are installed
	A	B	C	D	E	Pde
ECT4PT/ECT4PO	235 mm	143 mm	98 mm	127 mm	46 mm	10W
ECT8PT/ECT8PO	236 mm	287 mm	112 mm	107 mm	180 mm	16W
ECT12PT/ECT12PO	236 mm	287 mm	112 mm	107 mm	180 mm	30W
ECT18PT/ECT18PT	361 mm	287 mm	112 mm	232 mm	180 mm	30W
ECT24PT/ECT24PO	485 mm	287 mm	112 mm	357 mm	180 mm	30W
ECT36PT/ECT36PO	652 mm	287 mm	112 mm	482 mm	180 mm	35W
ECT48PT/ECT48PO	236 mm	396 mm	112 mm	107 mm	289 mm	25W
ECT2x18PT/ECT2x18PO	361 mm	396 mm	112 mm	232 mm	289 mm	30W
ECT3x18PT/ECT3x18PO	526 mm	396 mm	112 mm	357 mm	289 mm	35W
ECT3x18PT/ECT3x18PO	651 mm	396 mm	112 mm	482 mm	289 mm	40W

*Sizes are also valid for IT distribution boards DIDO-E MEDIA: ECT...MEDIA

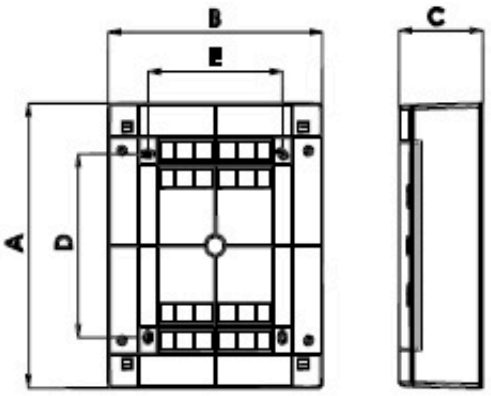

Flush mounted distribution board

type	Dimensions							Max. allowed power losses when Max. number of devices are installed
	A	B	C	D	E	F	G	Pde
ECM4PT/ECM4PO	232 mm	139 mm	99 mm	-	123 mm	216 mm	69 mm	10W
ECM8PT/ECM8PO	232 mm	211 mm	99 mm	-	201 mm	212 mm	68 mm	16W
ECM12PT/ECM12PO	232 mm	283 mm	106 mm	-	273 mm	212 mm	68 mm	25W
ECM18PT/ECM18PO	357 mm	283 mm	106 mm	125 mm	273 mm	336 mm	68 mm	30W
ECM24PT/ECM24PO	482 mm	283 mm	106 mm	125 mm	273 mm	462 mm	68 mm	30W
ECM36PT/ECM36PO	232 mm	392 mm	106 mm	-	382 mm	212 mm	68 mm	25W
ECM2x18PT/ECM2x18PO	357 mm	392 mm	106 mm	125 mm	382 mm	336 mm	68 mm	30W
ECM3x18PT/ECM3x18PO	522 mm	392 mm	106 mm	125 mm	382 mm	502 mm	68 mm	35W

