



***CH22x58 aM 32A/690V**

Fuse link

ETI Code:	002641015
Product group:	C low Voltage cylindrical fuses
Catalogue Group:	C low Voltage cylindrical fuses
Type description:	CH
Fuse type:	CH
Size:	22x58
Rated current:	32 A
Rated AC voltage:	690 V
Time-Current Characteristic:	aM
Breaking capacity AC:	80 kA
Application:	For relays, contactors and motors protection in case of short-circuit
Power dissipation:	2.6 W
Standards:	IEC 60269-1, IEC 60269-2

Online product page

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Size	22x58 mm
Breaking capacity	80 kA

Logistics

Product

EAN code for a single product	3838895581291
Net weight of the product	52 g
Net width	22.2 mm
Net height	58 mm
Net depth	22.2 mm
Stock unit of measure	pcs


Basic Packaging

Basic packaging quantity	10 pcs
EAN code for a basic packaging	3838895169888
Basic packaging weight	0.52 kg
Basic packaging volume	0.33 dm³


Transport Packaging

Transport packaging quantity	500 pcs
EAN code for a transport packaging	3838895169895
Transport packaging weight	26.3 kg
Transport packaging volume	16.5 dm³
Pallet quantity	26,000 pcs
Customs tariff	85361050


I/t characteristic

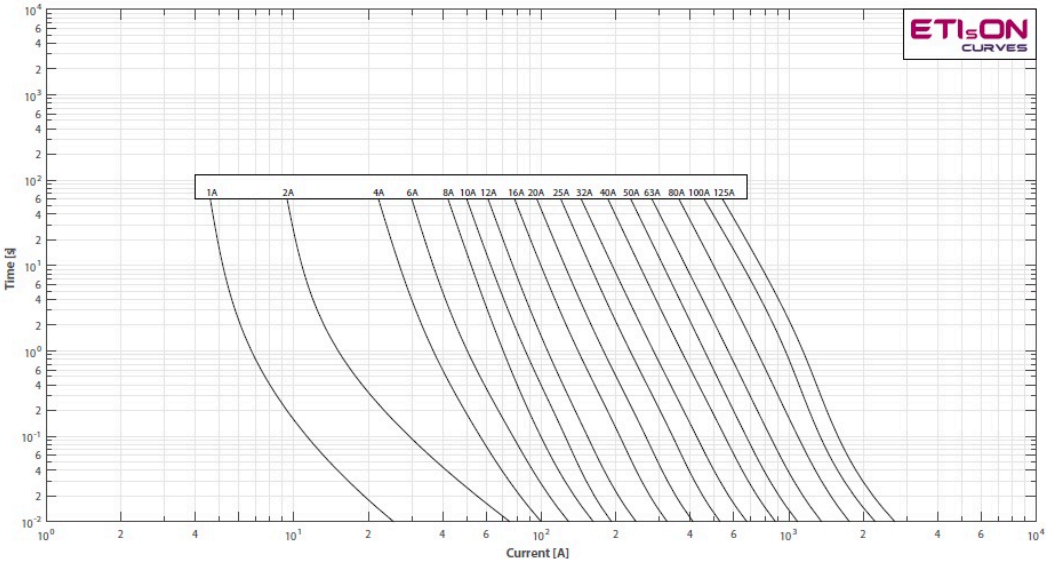

CutOff

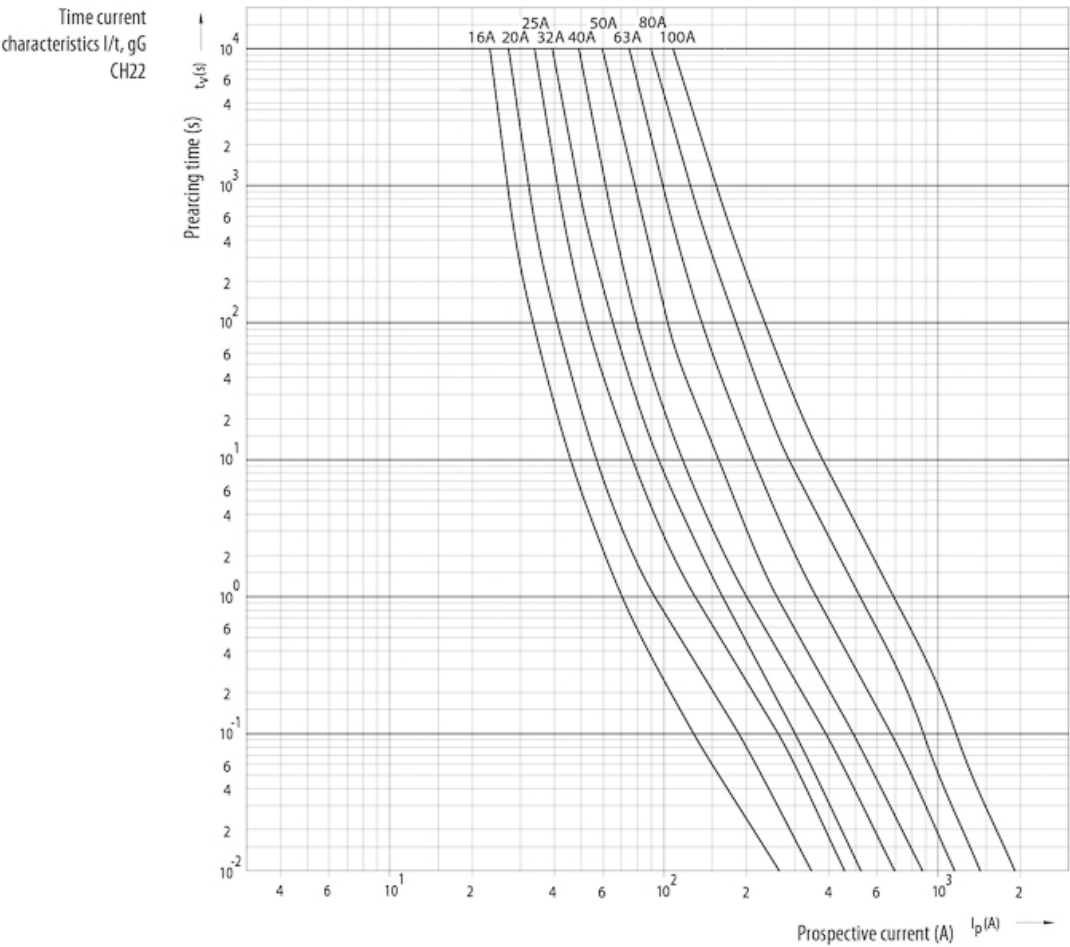

Dimension

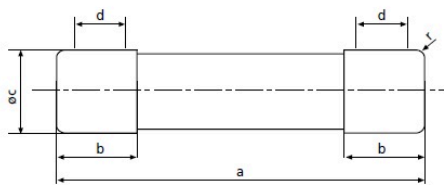

size	a	b _{max}	c	d _{min} *	r
8 x 32	31,5±0,5	6,7	8,5±0,1	4	1±0,5
10 x 38	38,0±0,6	10,5	10,3±0,1	6	1,5±0,5
14 x 51	51,0+0,6/-1	13,8	14,3±0,1	7,5	±1
22 x 58	58,0+0,1/-2	16,2	22,2±0,1	11	±1

Energy characteristic

