

KVL-00 3p BC95-BC95

Fuse switch disconnecter

 KVL-00 3p BC95-BC95

ETI Code:	001690871
Type of Installation:	Base plate mounting
Size:	NH00
Rated current:	160 A
Number of poles:	3
Rated AC voltage:	690 V
Rated DC voltage:	440 V
Utilization category:	AC-23B, DC-22B
Type description:	KVL

[Online product page](#) 

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Version as safety switch	Yes
Suitable for floor mounting	Yes
Rated permanent current Iu	160 A
Suitable for fuses	NH00
Type of control element	Cover grip
Type of electrical connection of main circuit	Screw connection
Number of poles	3
Version as main switch	Yes

Logistics


Product

Net weight of the product	0.67 kg
Net width	105.5 mm
Net height	205 mm
Net depth	83.19 mm
Stock unit of measure	pcs



Transport Packaging

Transport packaging quantity	1 pcs
EAN code for a transport packaging	3838895822837
Transport packaging weight	0.719 kg
Transport Packaging Dimensions Height	108 mm
Transport Packaging Dimensions Width	217 mm
Transport Packaging Dimensions Depth	85 mm
Transport packaging volume	1.992 dm³
Pallet quantity	385 pcs
Customs tariff	85363090

Dimension

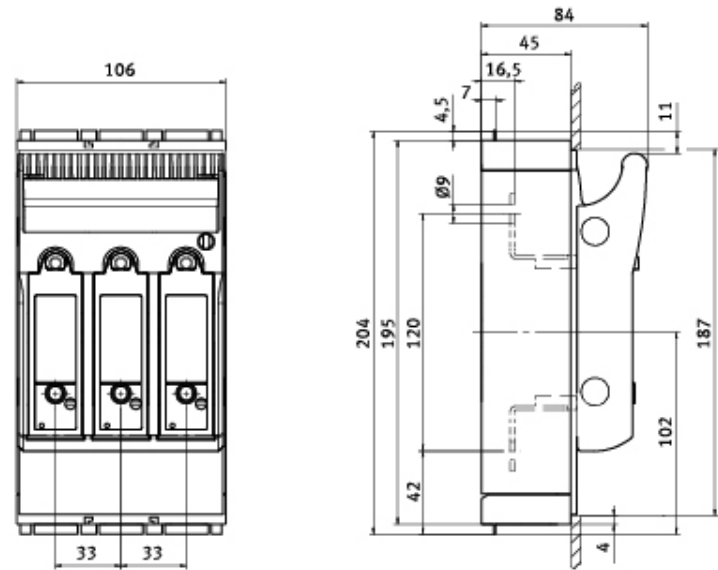

KVL-00 3p M8-M8
KVL-00 3p BC95-BC95
KVL-00 3p M8-M8 LED
KVL-00 3p BC95-BC95 LED

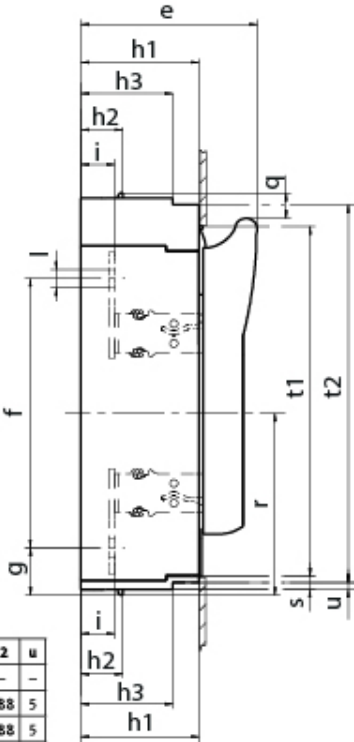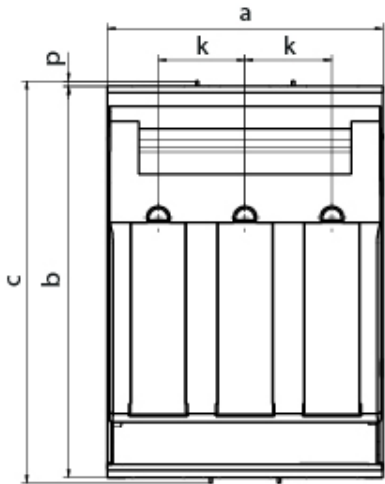

	a	b	c	e	f	g	h1	h2	h3	i	k	l	p	q	r	s	t1	t2	u
KVL-1 3p M10-M10 (LED)	184	298	306	117	185	46	70	32	-	25	58	Ø10,5	4	19	138	5	272	-	-
KVL-2 3p M10-M10 (LED)	210	298	306	134	205	36	90	32	70	26	66	Ø14	4	19	138	10	268	288	5
KVL-3 3p M10-M10 (LED)	250	298	306	143	205	36	90	32	70	26	82	Ø14	4	19	138	10	268	288	5