

SL1 1P SP.240

Strip type fuse sw.disconn.

ETI Code:	**001692112**
Type of Installation:	**Busbar mounting**
Size:	**NH1**
Rated current:	**250 A**
Number of poles:	**3**
Rated AC voltage:	**690 V**
Utilization category:	**AC-23B**
IP rating:	**IP30**

Online product page

Documents

TECHNICAL DATA CATALOG

INSTRUCTION MANUAL

CE DECLARATION

2D FILE

3D FILE

EPLAN FILE

ETIM

Max. rated operation voltage Ue AC	**690 V**
Rated permanent current Iu	**250 A**
Suitable for fuses	**NH1**
Type of control element	**Other**
Conditioned rated short-circuit current Iq	**120 kA**
Cable entry	**Other**
Type of electrical connection of main circuit	**Frame clamp**
Degree of protection (IP), front side	**IP30**
Number of poles	**3**
Rated operation power at AC-23, 400 V	**173 kW**
Suitable for busbar mounting	**Yes**
Position control element	**Front side**

Logistics

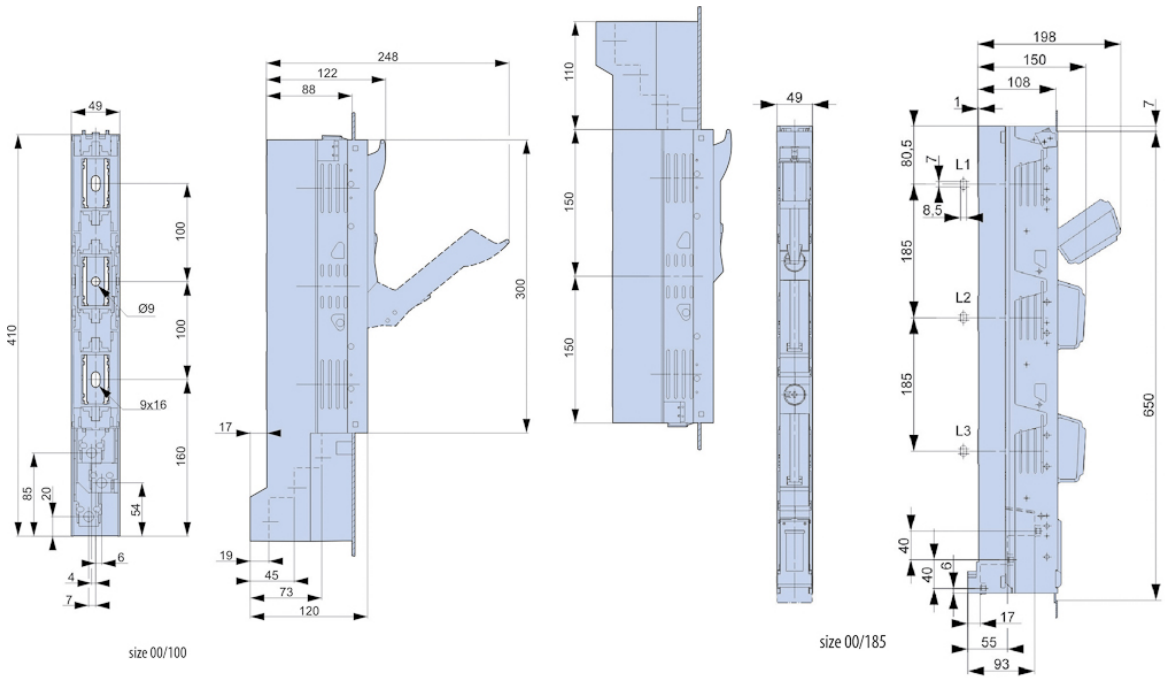
Product

EAN code for a single product	**3838400001641**
Net weight of the product	**4.9 kg**
Net width	**100 mm**
Net height	**662 mm**
Net depth	**195.4 mm**
Stock unit of measure	**pcs**

Transport Packaging

Transport packaging quantity	**1 pcs**
EAN code for a transport packaging	**4029155518426**
Transport packaging weight	**5.186 kg**
Transport Packaging Dimensions Height	**205 mm**
Transport Packaging Dimensions Width	**764 mm**
Transport Packaging Dimensions Depth	**100 mm**
Transport packaging volume	**15.662 dm³**
Pallet quantity	**50 pcs**
Customs tariff	**85389099**

Dimension


49
410
100
100
160
Ø9
9x16
85
20
54
6
4
7
248
122
88
300
17
19
45
73
120
110
150
150
49
198
150
108
1
7
80,5
7
L1
8,5
185
L2
185
L3
650
40
40
6
17
55
93
size 00/100
size 00/185