


EFD 10 3p

Fuse disconnecter

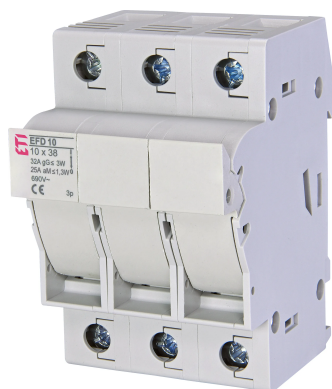

ETI Code:	002540004
To use with:	CH fuse-links
Product group:	LV-fuse-switch disconnecter
Catalogue Group:	LV-fuse-switch disconnecter
Overvoltage Category:	III
Type description:	EFD
Size:	10x38
Type of Installation:	DIN rail
Number of poles:	3
Rated AC voltage:	690 V
Utilization category:	AC-22B
Rated current:	32 A
Ambient temperature:	-5/40 °C
Max Permissible Power Dissipation per Fuse Link:	3 W
Standards:	IEC60947-1, IEC60947-3
Application:	Residential and industrial installation
IP rating:	IP20

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



CE DECLARATION



CERTIFICATE



2D FILE



3D FILE



EPLAN FILE

ETIM

Built-in depth	60 mm
For fuse size	10x38 mm
Degree of protection (IP)	IP20
Mounting method	DIN rail
Nominal voltage	690 V
Number of poles	3
Width in number of modular spacings	3

Logistics

Product

EAN code for a single product	3838895744917
Net weight of the product	184 g
Net width	52.5 mm
Net height	82.9 mm
Net depth	64.4 mm
Stock unit of measure	pcs


Basic Packaging

Basic packaging quantity	4 pcs
EAN code for a basic packaging	3838895702160
Basic packaging weight	0.792 kg
Basic Packaging Dimensions Height	79 mm
Basic Packaging Dimensions Width	220 mm
Basic Packaging Dimensions Depth	91 mm
Basic packaging volume	1.582 dm³

Transport Packaging

Transport packaging quantity	36 pcs
EAN code for a transport packaging	3838895702177
Transport packaging weight	7.481 kg
Transport Packaging Dimensions Height	0.25 m
Transport Packaging Dimensions Width	0.235 m
Transport Packaging Dimensions Depth	0.295 m
Transport packaging volume	0.017 m³
Pallet quantity	1,872 pcs
Customs tariff	85389099

Dimension

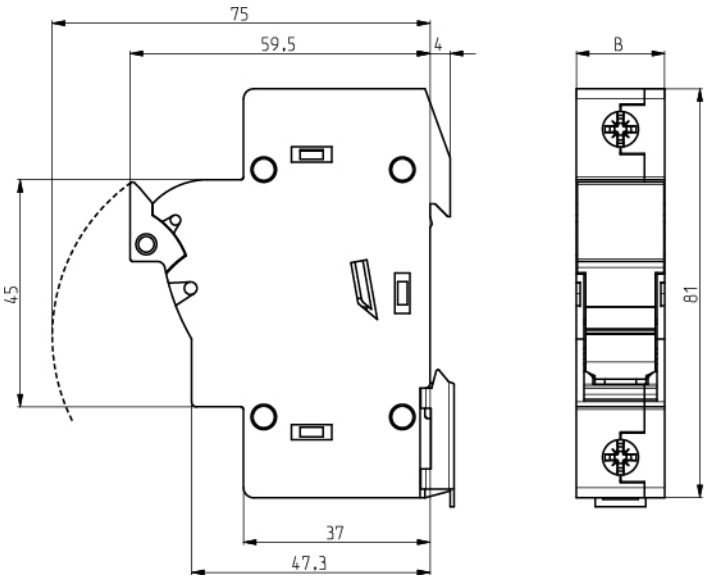

	B
EFD 8, 10 1p	17,5
EFD 8, 10 1p+N	35
EFD 8, 10 2p	35
EFD 8, 10 3p	52,5
EFD 8, 10 3p+N	70