



NH1/85 aM 200A/1000V

Fuse link

ETI Code:	004184438
Fuse type:	NH
Size:	NH1/85
Rated current:	200 A
Time-Current Characteristic:	aM
Indicator:	Top fuse status indicator
Rated AC voltage:	1000 V
Breaking capacity AC:	25 kA
Power dissipation:	28 W
Prearcing joule integral (A2s):	110,000
Operating joule integral (A2s):	600,000
Standards:	VDE 0636-2011
Application:	For relays, contactors and motors protection in case of short-circuit

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



2D FILE



3D FILE



EPLAN FILE

ETIM

Rated switching capacity AC	25 kA
Voltage type	AC
Fuse construction type according to IEC 60269	Other
Rated voltage AC	1,000
Power loss at rated current	28 W
Type of fuse status indicator	Top fuse status indicator
Rated current	200 A
Utilization category	aM (switchgear protection)

Logistics

Product

Net weight of the product	550 g
Net width	47 mm
Net height	156.2 mm
Net depth	62.8 mm
Stock unit of measure	pcs


Basic Packaging

Basic packaging quantity	1 pcs
EAN code for a basic packaging	3838895638513
Basic packaging weight	0.55 kg
Basic Packaging Dimensions Height	0.055 m
Basic Packaging Dimensions Width	0.205 m
Basic Packaging Dimensions Depth	0.076 m
Basic packaging volume	0.001 m³


Transport Packaging

Transport packaging quantity	16 pcs
EAN code for a transport packaging	3838895638520
Transport packaging weight	9.15 kg
Transport Packaging Dimensions Height	0.255 m
Transport Packaging Dimensions Width	0.295 m
Transport Packaging Dimensions Depth	0.235 m
Transport packaging volume	0.018 m³
Pallet quantity	832 pcs
Customs tariff	85361090

I/t characteristic

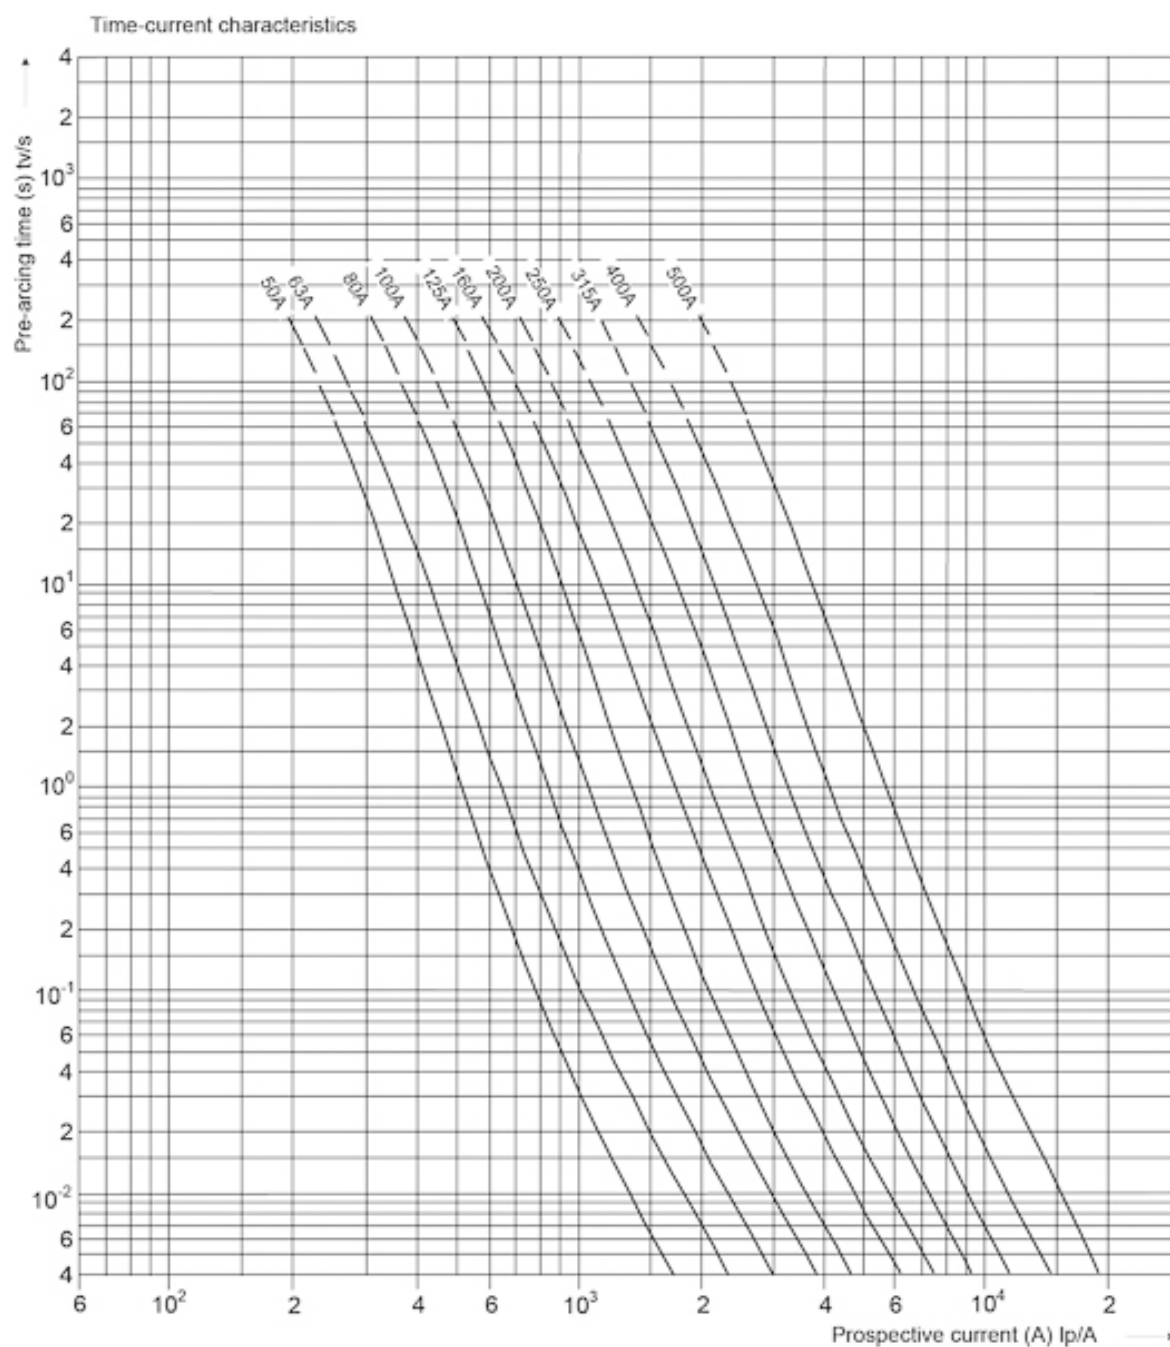

Dimension

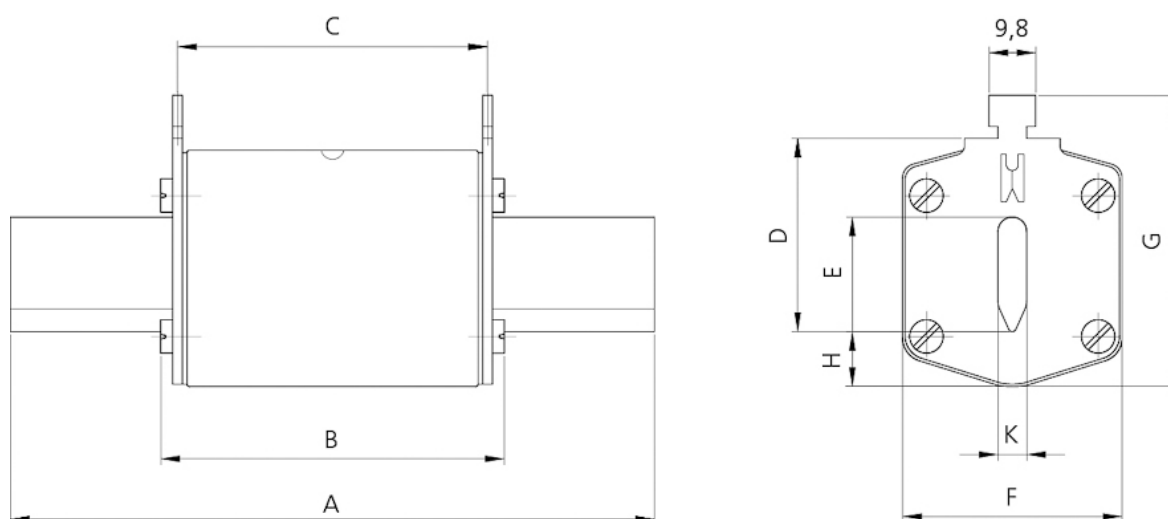

Size	Dimensions [mm]								
	A	B	C	D	E	F	G	H	K
1	155	91	85	40	24	46	61	12	6
3	170	91	85	60	32	64	84	13	6

Energy characteristic

Cut-off characteristics

