



*CH14x51 gG 40A/500V

Fuse link

ETI Code:	002630017
Product group:	C low Voltage cylindrical fuses
Catalogue Group:	C low Voltage cylindrical fuses
Type description:	CH
Fuse type:	CH
Size:	14x51
Rated current:	40 A
Rated AC voltage:	500 V
Time-Current Characteristic:	gG
Breaking capacity AC:	120 kA
Application:	For cable protection
Power dissipation:	4.8 W
Standards:	IEC 60269-1, IEC 60269-2

[Online product page](#)

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



CERTIFICATE



2D FILE



3D FILE



EPLAN FILE

ETIM

Size	14x51 mm
Breaking capacity	120 kA
Utilization category	Other

Logistics

Product

EAN code for a single product	3838895581444
Net weight of the product	18.75 g
Net width	14.3 mm
Net height	51 mm
Net depth	14.3 mm
Stock unit of measure	pcs

Basic Packaging


Basic packaging quantity	10 pcs
EAN code for a basic packaging	3838895138952
Basic packaging weight	0.186 kg
Basic packaging volume	0.126 dm³

Transport Packaging


Transport packaging quantity	200 pcs
EAN code for a transport packaging	3838895582601
Transport packaging weight	3.98 kg
Transport packaging volume	3.386 dm³
Pallet quantity	34,000 pcs
Customs tariff	85361050

CutOff

Cut-off current
characteristics
CH14

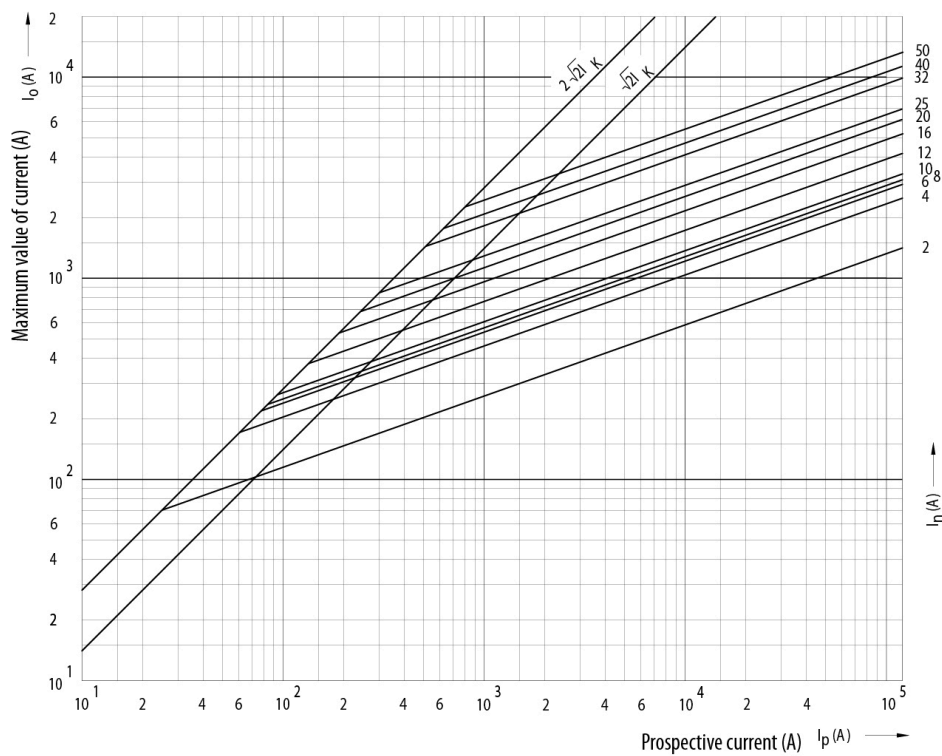


Dimension

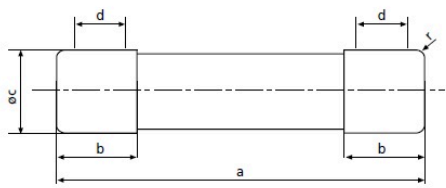

size	a	b _{max}	c	d _{min}	r
8 x 32	31,5±0,5	6,7	8,5±0,1	4	1±0,5
10 x 38	38,0±0,6	10,5	10,3±0,1	6	1,5±0,5
14 x 51	51,0+0,6/-1	13,8	14,3±0,1	7,5	±1
22 x 58	58,0+0,1/-2	16,2	22,2±0,1	11	±1

Energy characteristic

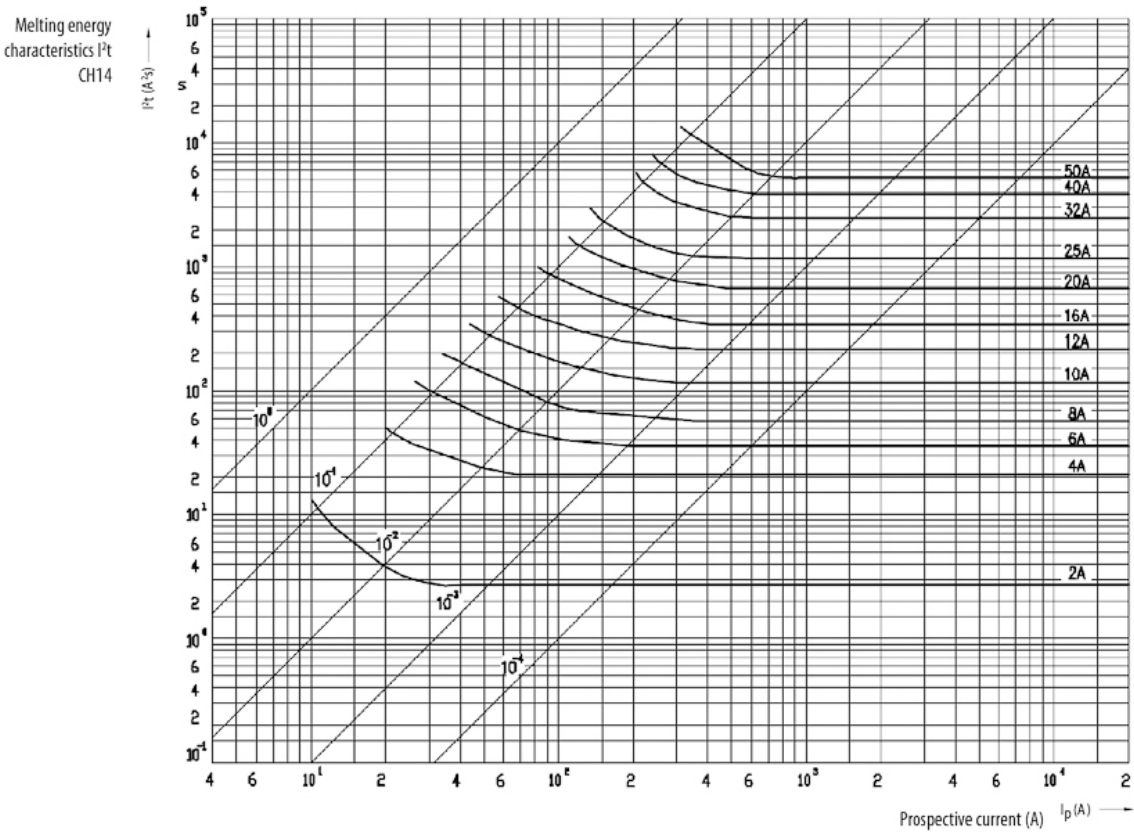

I/t characteristic

