



KVL-1 1p M10-M10

Fuse switch disconnecter

ETI Code:	001690891
Type of Installation:	Base plate mounting
Size:	NH1
Rated current:	250 A
Number of poles:	1
Rated AC voltage:	690 V
Rated DC voltage:	440 V
Utilization category:	AC-23B, DC-22B
Type description:	KVL

[Online product page](#) 

Documents



TECHNICAL DATA CATALOG



INSTRUCTION MANUAL



CE DECLARATION



2D FILE



3D FILE



EPLAN FILE

ETIM

Version as safety switch	Yes
Suitable for floor mounting	Yes
Rated permanent current lu	250 A
Suitable for fuses	NH1
Type of control element	Cover grip
Type of electrical connection of main circuit	Screw connection
Number of poles	1
Version as main switch	Yes

Logistics


Product

Net weight of the product	0.93 kg
Net width	68.5 mm
Net height	305.4 mm
Net depth	116.3 mm
Stock unit of measure	pcs


Transport Packaging

Transport packaging quantity	1 pcs
EAN code for a transport packaging	3838895822936
Transport packaging weight	0.906 kg
Transport Packaging Dimensions Height	165 mm
Transport Packaging Dimensions Width	315 mm
Transport Packaging Dimensions Depth	77 mm
Transport packaging volume	4.002 dm³
Pallet quantity	250 pcs
Customs tariff	85363090

Dimension

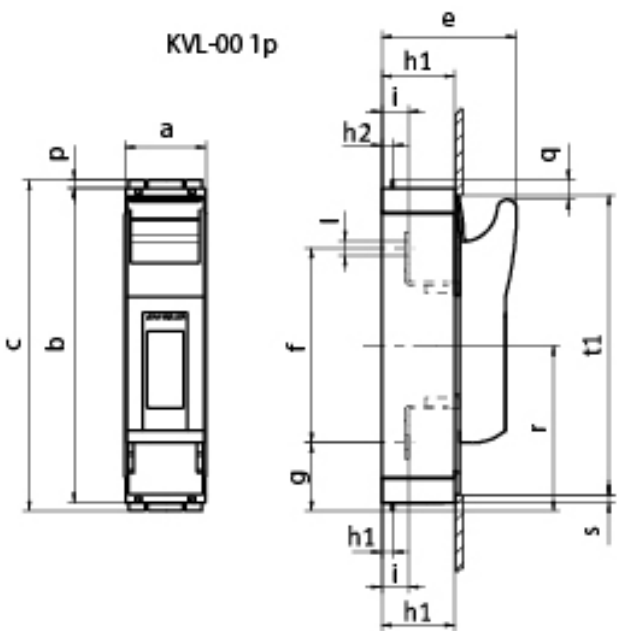

	a	b	c	e	f	g	h1	h2	h3	i	l	p	q	r	s	t1
KVL-00 1p M8-M8	50	195	204	84	120	42	45	7	-	16,5	Ø9	4,5	12	102	5	187
KVL-00 2p M8-M8	100	195	204	84	120	42	45	7	-	16,5	Ø9	4,5	12	102	5	187

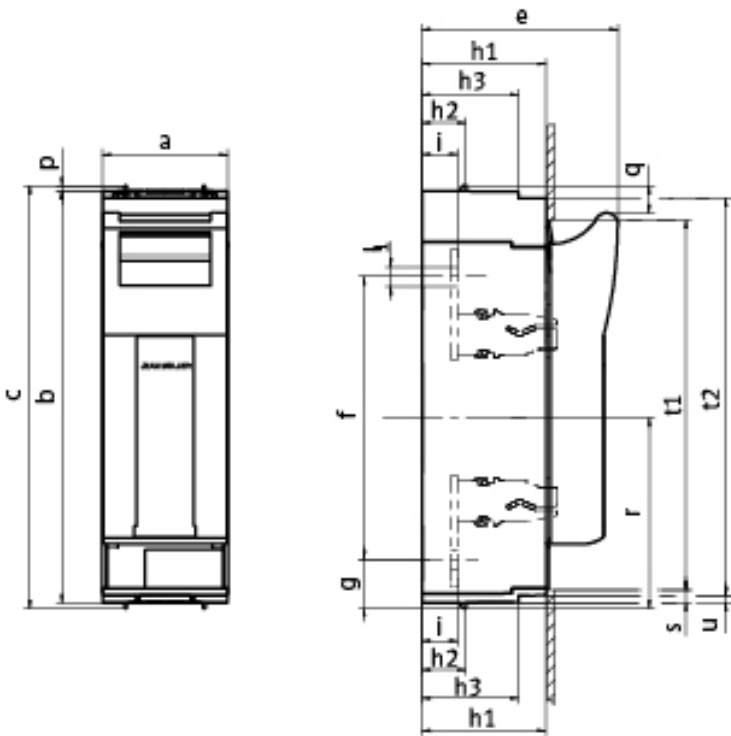

	a	b	c	e	f	g	h1	h2	h3	i	l	p	q	r	s	t1	t2	u
KVL-1 1p M10-M10	69	298	306	117	185	46	70	32	-	25	Ø10,5	4	19	138	5	272	-	-
KVL-3 1p M10-M10	91	298	306	143	205	36	90	32	70	26	Ø14	4	19	138	10	268	288	5